


CSM-3501A1

3.5" Color TFT LCD Monitor



USER MANUAL

Appearance

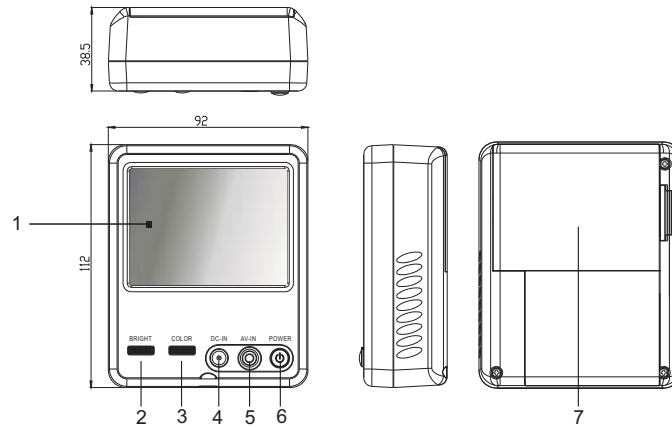

1. 3.5" TFT LCD Screen
2. Brightness Adjust Up/Down Thumbwheel Control
3. Color Adjust Up/Down Thumbwheel Control
4. DC Power Input Jack(DC 12V)
5. Video Input Jack(RCA)
6. Power On/Off Switch Button
7. Battery cover(AA x 9)

Caution

1. Don't expose to direct sunlight.
(refer to specification)
2. Don't expose temperature extremes.
(refer to specification)
3. Avoid dropping and strong impact.
4. Avoid wet and dust.
5. Never attempt to take apart and maintain by yourself.

Specifications

Display	: 3.5" color TFT LCD
Resolution	: 960(H) x 234(V)
Action Area	: 71.6(H) x 52.65(V)
Dot Pitch	: 0.0745(H) x 0.225(V)
Pixel Configuration	: R.G.B delta
Back Light	: LED
Input Signal	: NTSC & PAL (auto switch) composite video signal (1 Vp-p / 75 ohm)
Lamp Life-time	: 10,000 hr min. (at Tamb = 25° C)
Viewing Angle (TYP.):	Right/Left 50 deg Top 15 deg Bottom 35 deg
Brightness	: Typ. 220 cd/m ²
Contrast Ratio	: Typ. 350
Battery	: AA battery x 9 pcs
Battery life time	: 3~4hours
DC power	: 12 V ~ 24 V (ripple 0.5 Vp-p max.)
Range of Operating Voltage	: DC 10 V ~ 30 V
Power Consumption	: 2.5 W max.
Operating Temperature	: 0 °C ~ 60 °C
Storage Temperature	: -20 °C ~ 70 °C
Operating Humidity	: Max. 85% RH
Storage Humidity	: Max. 85% RH
Overall Dimension	: 92(W) x 112(H) x 38.5(D)mm
Weight	: 0.18Kg